

Standard & ODD Size

Taping Type

Shape	Name	Specification	Taping style
Radial type	Standard taping	5mm lead spacing with 12.7mm body width	A1,A2,A3
	Odd size taping(1)	5/7.5mm lead spacing with 15mm and up body width	B,C,D,E

Standard taping of Radial type

(Unit:mm)

Style A1			Style A2		
	P	12.7		P	12.7
	P ₀	12.7		P ₀	12.7
	F	5.0		F	5.0
	H ₀	16.0		H ₀	16.0
	H ₁	32.2max		H ₁	32.2max

Style A3		
	P	12.7
	P ₀	12.7
	F	5.0
	H ₀	16.5/18.5
	H ₁	32.2max

Odd size taping(1)

(Unit:mm)

Style B			Style C		
	P	15.0		P	25.4
	P ₀	15.0		P ₀	12.7
	F	5.0		F	5.0
	H ₀	16.0		H ₀	16.0
	H ₁	37.0max		H ₁	37.0max



Style D			Style E		
	P	15.0		P	30.0
	P ₀	15.0		P ₀	15.0
	F	7.0		F	7.5
	H ₀	16.0		H ₀	16.0
	H ₁	42.0max		H ₁	42.0max

PRODUCTS SPECIFICATION

Standard & Odd Size

Dimensions

Style A1 ~ A3,B,D				Style C,E		
Code	Style A1 ~ A2	Style A3	Style B	Style C	Style D	Style D
P	12.7±1.0	12.7±1.0	15.0±1.0	25.4±1.0	15.0±1.0	30.0±1.0
P ₀	12.7±0.2	12.7±0.2	15.0±0.2	12.7±0.2	15.0±0.2	15.0±0.2
P' ₀	---	---	---	25.4±0.2	---	30.0±0.2
P ₁	3.85±0.5	3.85±0.5	5.0±0.5	3.85±0.5	3.75±0.5	3.75±0.5
P ₂	6.35±1.3	6.35±1.3	7.5±1.3	6.35±1.3	7.5±1.3	7.5±1.3
F	5.0 ^{+0.8} _{-0.2}	5.0 ^{+0.8} _{-0.2}	5.0 ^{+0.8} _{-0.2}	5.0 ^{+0.8} _{-0.2}	7.5 ^{+0.8} _{-0.2}	7.5 ^{+0.8} _{-0.2}
Δh	0±2.0					
W	18.0±0.5					
W ₀	9.5 min.					
W ₁	9.0±0.5					
W ₂	0 -3.0					
H ₀	16.5±0.5	16.5±0.5	16.0±0.5	16.0±0.5	16.0 ^{+1.0} ₋₀	16.0 ^{+1.0} ₋₀
H ₁	32.2 max.	32.2 max.	39 max.	39 max.	44 max.	44 max.
ℓ	2.0 max.			0		
ℓ ₀	7.0 max.					
φD ₀	4.0±0.2					
t	0.7±0.2					
L	11.0 max.					

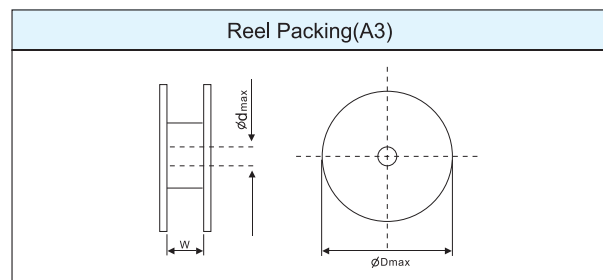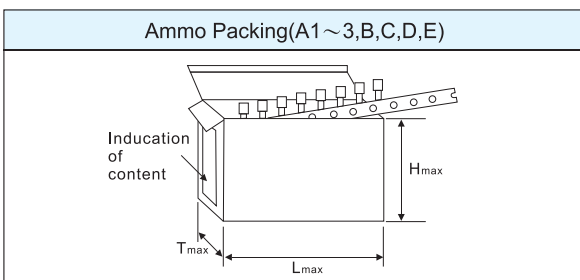

Size of inner box

Box code	Dimension (mm)		
	L max	T max	H max
No.1	335	55	285
No.2	350	60	320

Packing quantity of per inner box

Box code	Thickness	Qty/box
No.1		1000 pcs
No.2	5.5 under	600 pcs
	5.6-7	500 pcs
	7.1-8.6	400 pcs
	8.7-13.5	250 pcs